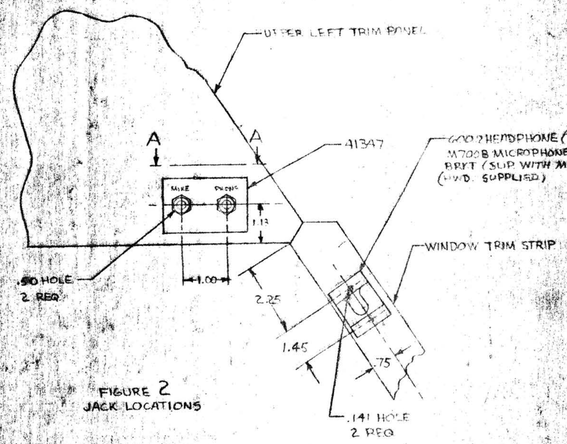

FIGURE 2
JACK LOCATIONS

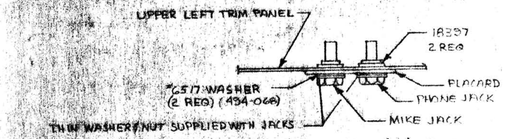

SECTION A-A

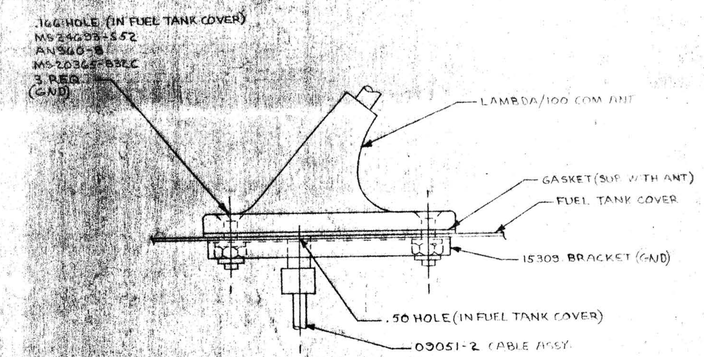

FIGURE 1
COMM ANT INSTL.

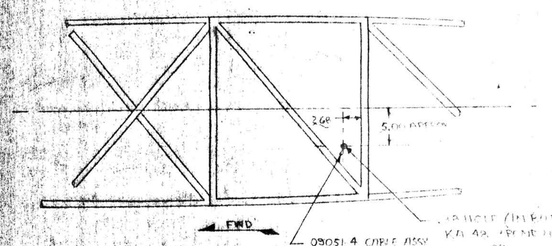

FIG. 3
XPOND ANT INSTL (METAL BOTTOM)
KA-48 (KING) OR AT150 (NARCO)

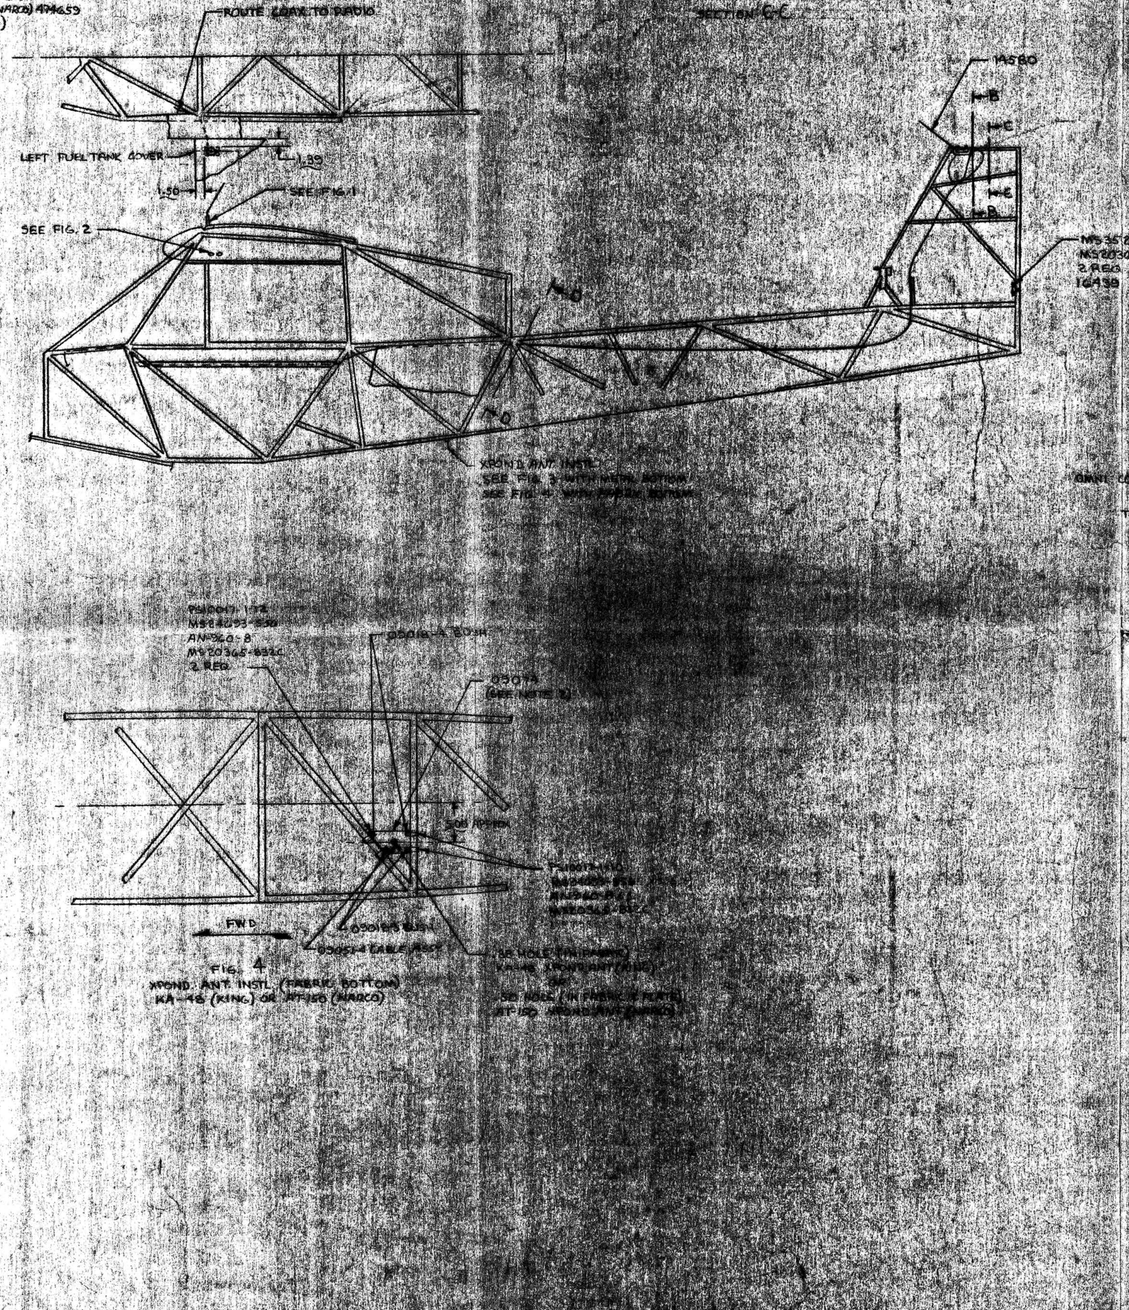

Fig. 4
XPOND. ANT. INSTL. (FABRIC BOTTOM)
KA-48 (KING.) OR AT-150 (NARCO)

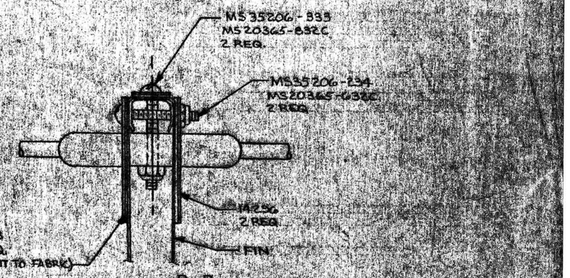

SECTION B-B

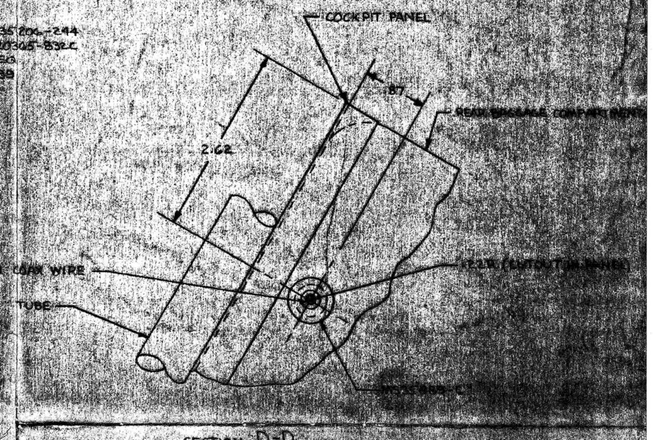

SECTION D-D

NOTE
1. INSTALL A MS27212-1-4 (568-464) TERM. STRIP TO THE INSIDE CHANNEL ASSY. FEED A #20 A/W WIRE TO STRIP & ROUTE TO THE NAV LIGHT SWITCH.
2. DOPE FABRIC TO MOUNTING PLATE AS PER APPROVED METHOD.

PIPER AIRCRAFT CORP.	ANTENNA & COAX INSTL
09055	CA-18-5 ORIG